



CHAIN CONVEYOR CC20-50-100-125

CC20-50-100-125

ALBINBİLEK Chain Conveyors, ensure powder and granule products to be transported as straight or inclined in the desired capacity in an economical way and without any damage. It has a completely closed and impermeable structure.

FEATURES

- Full Bolt Joint, Easy-to-assemble Body Structure
- Maximum Endurance
- Heat-treated Rotary Api Type Chain
- Bolt-fixed Plastic Pallets in the Chain
- Maximum Base Cleaning Performance with Angled Plastic Scraper Pallets
- Return Bucket on Each Scraper Pallet
- Impermeable Dust Seals
- Manual Screwed Tensioning System
- Multiple Loading and Unloading
- Bidirectional Product Transportation

DRIVE SYSTEM

- Drive System Mountable at Right or Left
- Power Transmission with Belt-Pulley Connection (Standard)
- Reducer Motor Hollow Shaft (Optional)
- Reducer Motor Full Shaft and Coupling (Optional)

SECURITY SYSTEM

- Speed Sensor (Standard)
- Excessive-product Detection Sensor (Standard)
- Chain Breaking Detection Sensor (Optional)
- Roller Heat Detection Sensor (Optional)
- Roller Pulse Detection Sensor (Optional)

ACCESSORIES

- Control Windows
- Inlet Module
- Outlet Module
- Housing for Rotating parts
- Raincoat and Sun Shield for Motor
- Support Legs with Height Adjustment
- Wear Plates (Optional)

TECHNICAL SPECIFICATIONS

Machine	CC20	CC50	CC100	CC125
Maximum Capacity	70m ³ /h	100m ³ /h	150m ³ /h	180m ³ /h
Maximum Chain Speed	0.80m/s			
Maximum Length and Slope	According to the product specifications			
Sound Level	70-85 dB			
Operating Conditions	-15°C ÷ 40°C ambient temperature			


MATERIALS

Body	Standard	Galvanized Steel and Hot Dipped Galvanized Coating
	Optional	Stainless
		Painted
Wear Plates (Bottom and Sides)	Standard	None
	Optional	UHMW1000, Hardox
Chain	Standard	Steel, with Return Bucket
	Optional	Stainless
Scraper Pallet	Standard	Plastik (PP-COP)
	Optional	UHMW1000
		Antistatic
Chain Return	Standard	Plastic Pullet (PA6)
	Optional	Slide

COMPATIBILITY


ATEX	Standard	Out of Zone
	Optional	Zone 22 - 21

NOTE: ATEX compatibility requires special requirements



CHAIN CONVEYOR CC20-50-100-125

CC20-50-100-125

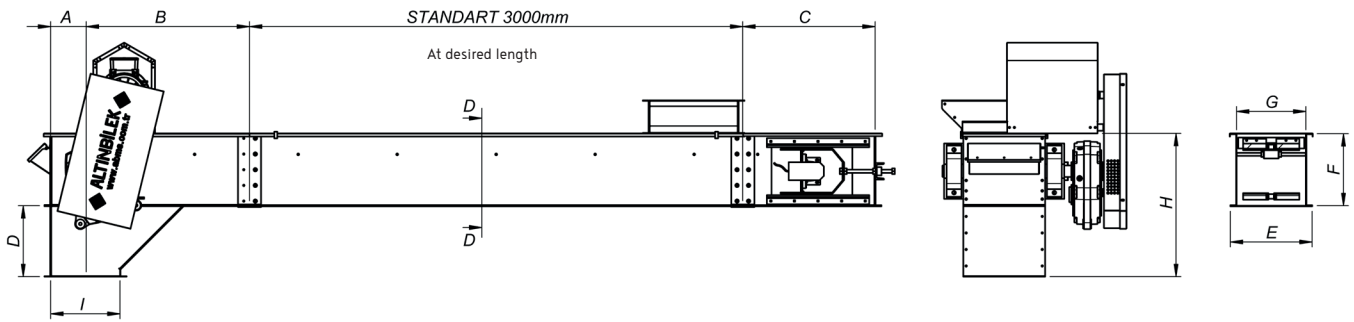

MODEL	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	G(mm)	H(mm)	I(mm)
CC20	115	690	800	350	256	310	180	660	180x180
CC50	115	1090	800	400	256	436	180	836	180x230
CC100	115	1090	800	400	306	436	230	836	230x230
CC125	133	1072	800	400	341	436	265	836	265x265

Designs and dimensions are subject to change without notice.