

CHAIN CONVEYOR CC150-180-200-250

CC150-180-200-250

ALTINBILEK Chain Conveyors, ensure powder and granule products to be transported as straight or inclined in the desired capacity in an economical way and without any damage. It has a completely closed and impermeable structure.

FEATURES

- Full Bolt Joint, Easy-to-assemble Body Structure
- Maximum Endurance
- Heat-treated Rotary Api Type Chain
- Bolt-fixed Plastic Pallets in the Chain
- Maximum Base Cleaning Performance with Angled Plastic Scraper Pallets
- Return Bucket on Each Scraper Pallet
- Impermeable Dust Seals
- Manual Screwed Tensioning System
- Multiple Loading and Unloading
- Bidirectional Product Transportation

DRIVE SYSTEM

- Drive System Mountable at Right or Left
- Power Transmission with Belt-Pulley Connection (Standard)
- Reducer Motor Hollow Shaft (Optional)
- Reducer Motor Full Shaft and Coupling (Optional)

SECURITY SYSTEM

- Speed Sensor (Standard)
- Excessive-product Detection Sensor (Standard)
- Chain Breaking Detection Sensor (Optional)
- Roller Heat Detection Sensor (Optional)
- Roller Pulse Detection Sensor (Optional)

ACCESSORIES

- Control Windows
- Inlet Module
- Outlet Module
- Housing for Rotating parts
- Raincoat and Sun Shield for Motor
- Support Legs with Height Adjustment
- Wear Plates (Optional)

TECHNICAL SPECIFICATIONS

Machine	CC150	CC180	CC200	CC250
Maximum Capacity	200m ³ /h	250m ³ /h	300m ³ /h	330m ³ /h
Maximum Chain Speed	0.82m/s			
Maximum Length and Slope	According to the product specifications			
Sound Level	70-85 dB			
Operating Conditions	-15°C ÷ 40°C ambient temperature			

MATERIALS

Body	Standard	Galvanized Steel and Hot Dipped Galvanized Coating
	Optional	Stainless
		Painted
Wear Plates (Bottom and Sides)	Standard	None
	Optional	UHMW1000, Hardox
Chain	Standard	Steel, with Return Bucket
	Optional	Stainless
Scraper Pallet	Standard	Plastik (PP-COP)
	Optional	UHMW1000
		Antistatic
Chain Return	Standard	Plastic Pullet (PA6)
	Optional	Slide

COMPATIBILITY

ATEX	Standard	Out of Zone
	Optional	Zone 22 - 21


NOTE: ATEX compatibility requires special requirements



CHAIN CONVEYOR

CC150-180-200-250

CC150-180-200-250

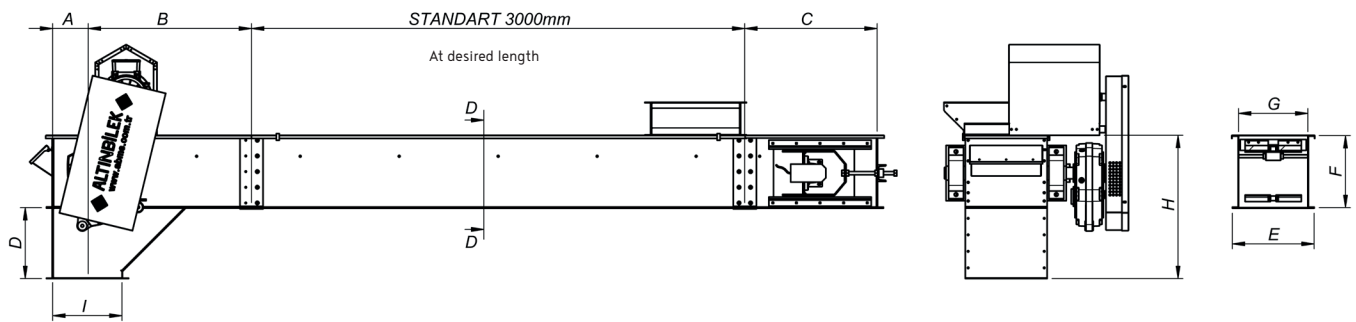

MODEL	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	G(mm)	H(mm)	I(mm)
CC150	153	1052	800	400	381	436	305	836	305x305
CC180	170	1035	800	400	416	436	340	836	340x340
CC200	210	995	800	400	496	436	420	836	420x420
CC250	225	980	800	400	526	436	450	836	450x450

Designs and dimensions are subject to change without notice.